

EQ LINE SPECIFICATIONS

COMPACT PEDESTRIAN STACKERS
WITH MONO MAST
24V, 1.2 TONNES

NSP12QLMI


VERSATILITY IN A SMALL PACKAGE

DO IT ALL WITH ONE LITTLE LIFT TRUCK

This economical, versatile and space-saving truck is ideal for light duties in warehouses, supermarkets and production areas. It's even small enough to take into vans and elevators. You can use it for short shuttle applications, stacking up to 1.95 metres, filling store shelves and order picking.



	Characteristics			
1.1	Manufacturer			Cat Lift Trucks
1.2	Manufacturer's model designation			NSP12QLMI
1.3	Power source			Battery
1.4	Operator type			Pedestrian
1.5	Load capacity	Q	(kg)	1200
1.6	Load centre distance	С	(mm)	600
1.8	Load wheel axle to fork face (forks lowered)	х	(mm)	812
1.9	Wheelbase	у	(mm)	1272
	Weight			
2.1b	Truck weight without load, with maximum battery weight		kg	685
2.2	Axle loadings with nominal load & maximum battery weight, drive / load side		kg	1190 / 695
2.3	Axle loadings without load & with maximum battery weight, drive / load side		kg	194 / 491
	Wheels, Drive Train			
3.1	Tyres: PT=Power Thane, Vul=Vulkollan, P=Polyurethane, N=Nylon, R=Rubber drive/load side			P/P
3.2	Tyre dimensions, drive side		(mm)	195 x 70
3.3	Tyre dimensions, load side	Ø	(mm)	80 x 70
3.4	Castor wheel dimensions (diameter x width)		(mm)	150 x 60
3.5	Number of wheels, load/drive side (x=driven)			1x + 1 / 4
3.6	Track width (centre of tyres), drive side	b10	(mm)	523
3.7	Track width (centre of tyres), load side	b11	(mm)	390
	Dimensions			
4.2a	Height with mast lowered	h1	(mm)	2050 / 2400
4.3	Free lift	h2	(mm)	1600 / 1950
4.4	Lift height (stroke)	h3+h13	(mm)	1600 / 1950
4.5	Height with mast extended	h4	(mm)	2060 / 2410
4.6	Initial lift (stroke)	h5	(mm)	120
4.9	Height of tiller arm / steering console (min./max.)	h14	(mm)	1150 / 1430
4.15	Fork height, fully lowered	h13	(mm)	90
4.19	Overall length	11	(mm)	1770
4.20	Length to fork face	12	(mm)	619
4.21	Overall width	b1	(mm)	800
4.22	Fork dimensions (thickness, width, length)	s/e/l	(mm)	60 / 180 / 1150
4.25	Outside width over forks (minimum-maximum)	b5	(mm)	570
4.32	Ground clearance at centre of wheelbase, (forks lowered)	m2	(mm)	17
4.33a	Working aisle width (Ast) with 1000 x 1200 mm pallets, load crosswise	Ast	(mm)	2286
4.34a	Working aisle width (Ast) with 800 x 1200 mm pallets, load lengthwise	Ast	(mm)	2224
4.35	Turning radius	Wa	(mm)	1450
	Performance			
5.1	Travel speed, with / without load		km / h	4.5 / 5
5.2	Lifting speed, with / without load		m/s	0.06 / 0.13
5.3	Lowering speed, with / without load		m/s	0.13 / 0.10
5.8	Maximum gradeability with / without load		%	6 / 15
5.10	Service brakes (mechanical / hydraulic / electric / pneumatic)			Electric
	Electric motors			
6.1	Drive motor capacity (60 min. short duty)		kW	0.65
6.2	Lift motor output at 15% duty factor		kW	2.2
6.4	Battery voltage/capacity at 5-hour discharge		V / Ah	24 / 60
6.5	Battery weight		kg	20
	Miscellaneous			
8.1	Type of drive control		10.111	Stepless
10.7.1	Level of noise at the ear level of the driver according to EN 12 053:2001 and EN ISO 4871, drive/lift/idle LpAZ		dB (A)	70

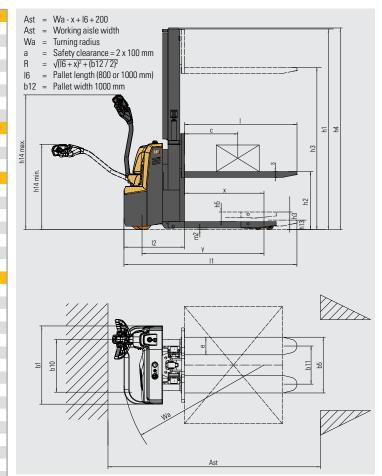

	NSP12QLMI					
	Mast Type	h3+h13	h1	h5	h4	
		mm	mm	mm	mm	
	Mono	1600	2050	120	2060	
		1950	2400	120	2410	

Mast Performance and Capacity

h3 = Lifting height

h13 = Fork height, fully lowered

h1 = Lowered mast height

h5 = Initial lift

h4 = Raised mast height

	LOAD DERATION - NSP120LMI					
	h3+h13	LC 600 mm				
	mm	kg				
Double stacker	1600	600 / 600				
On forks only	1600	1200				
Initial lift only	1600	1200				
Double stacker	1950	600 / 600				
On forks only	1950	1200				
Initial lift only	1950	1200				



CAT LIFT TRUCKS QUALITY - FOR EVEN THE SMALLEST JOBS

Our EQ line warehouse trucks have everything you need for dependable, entry-level materials handling. That includes sturdy construction, simple maintenance, energy-efficient features, robust performance, user-friendly design, and safety. A product line for light applications. If that's what you need to get your job done, the EQ line is your perfect choice.

Initial lift increases ground clearance, for smooth travel over ramped and uneven surfaces. It also enables double pallet handling, with one load on the support legs and one on the forks.

A compact Li-ion battery helps to minimise overall dimensions. Highly manoeuvrable, with a tight turning circle, the truck is ideal for narrow spaces. With a clear-view mast and a small truck body, it's easy to see and position loads at ground level and upwards.

Compactness, high stability and ergonomic tiller-arm control make the truck quick and comfortable in operation. Pallet load handling is smooth and strong, thanks largely to the high-quality forks and modern AC drive motor.

Durable construction and minimal maintenance needs mean low servicing bills. Together with a low price, long service life and economical energy consumption, these factors reduce your total cost of operation (TCO).







LOWER COST OF OWNERSHIP

- High-quality, robust construction ensures reliable operation over a long lifetime, with minimal servicing and repair needs.
- Fork wheel pivot points are enclosed and protected within the fork design to avoid wear when operating on ramps.
- Durable pull rod offers extra structural strength, with high resistance to bending and deforming, for reliable performance and long life.
- Adjustable balance wheel height extends lifespan of drive wheel.
- AC drive motor promises a long service life with low maintenance needs, thanks to elimination of brushes and commutators
- Sealing of motors reduces risk of damage by dust and water.
- Li-ion batteries give maximum lifespan, efficiency and runtime, with no need for water top-ups or other maintenance.
- Battery heating system optimises efficiency in cold environments, down to 1°C.
- Plug-in diagnostics and troubleshooting require only a laptop, software and a cable — not an expensive handheld device — to reduce downtime and maintain efficient performance.

UNMATCHED PRODUCTIVITY

- Compact and stable design enables fast, safe performance with great manoeuvrability.
- Small size partly due to compact Li-ion battery combines with efficient steering for a tight turning radius and easy use in narrow aisles.
- Side castor wheels further enhance stability.
- Clear-view mono masts give excellent forward vision and are available with maximum lifts up to 1.95 metres.

- Initial lift raises mast and forks to give increased ground clearance – for better performance on ramps, dock levellers and uneven floors.
- Double pallet handling design allows lifting and carrying of two loads simultaneously, with one on the support legs and one on the forks.
- Forks with tapered tips and integral tandem polyurethane wheels enable smooth pallet entry and exit and quiet running.
- 24V/60Ah high-capacity Li-ion battery gives powerful performance and long runtime between charges.
- Li-ion technology makes continuous operation possible, without battery changes, using fast opportunity charging during short breaks.
- Internal charger allows simple plugging in to any suitable electrical socket, wherever you are.
- External charger is supplied for convenient recharging at a designated station.
- BDI (battery discharge indicator) and hour meter support optimal timing of battery charging/changing.

SAFETY AND ERGONOMICS

- Ergonomic spring-loaded tiller arm provides a comfortable grip and low-effort operation for maximum control with minimal fatigue or strain.
- Tiller arm's length keeps the operator at a safe distance, while its offset attachment to the truck body offers the possibility of walking alongside.
- Multifunctional tiller head conveniently places controls within easy reach.
- Turtle/creep speed switch allows manoeuvring with tiller arm vertical, for safe movement through narrow spaces.
- Electromagnetic brake system enhances braking performance.
- Parking brake is automatically applied when the truck stops on gradients and ramps.
- Li-ion battery chemistry means no risk of hazardous gas or acid leaks.

EQ LINE LI-ION BATTERIES

Our EQ line warehouse trucks come equipped with lithium-ion (Li-ion) battery technology.

A great advantage of Li-ion is that it allows the use of opportunity charging. Instead of exchanging batteries between shifts, you can simply plug into a fast charger during short breaks. Your business will also enjoy the other efficiency, environmental and safety benefits outlined here.



LONGER LIFE

- 3 to 4 times lead-acid lifespan - reduces overall battery investment



FASTER CHARGING

– enables full charge in as little as1 hour with the fastest chargers



HIGHER EFFICIENCY

 energy losses during charging and discharging are up to 30% lower, so electricity consumption is reduced



NO BATTERY CHANGING

fast opportunity charging –
 15 minutes for several hours of extra runtime – makes operation convenient with just one battery and minimises the need to buy, store and maintain spares



LONGER RUNTIME

 thanks to more efficient battery performance and use of opportunity charges, which can be given at any time without damaging the battery or shortening its lifespan



NO DAILY MAINTENANCE

 the battery stays on board the truck for charging and there is no need for water top-ups or electrolyte checks





CONSISTENTLY HIGH PERFORMANCE

with a more constant voltage curve
maintains truck performance even as battery charge gets low




INBUILT PROTECTION

 intelligent battery management system (BMS) automatically prevents excessive discharge, charge, voltage and temperature, as well as virtually eliminating misuse

info@catlifttruck.com | www.catlifttruck.com

WESC2447(10/24) © 2024 MLE B.V. (registration no. 33274459). All rights reserved. CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow", the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.





VIDEOS



